


120V Wiring Diagram for Nuheat Thermostats with a Relay

Nuheat

For Conductor, Signature, Home & Element Thermostats

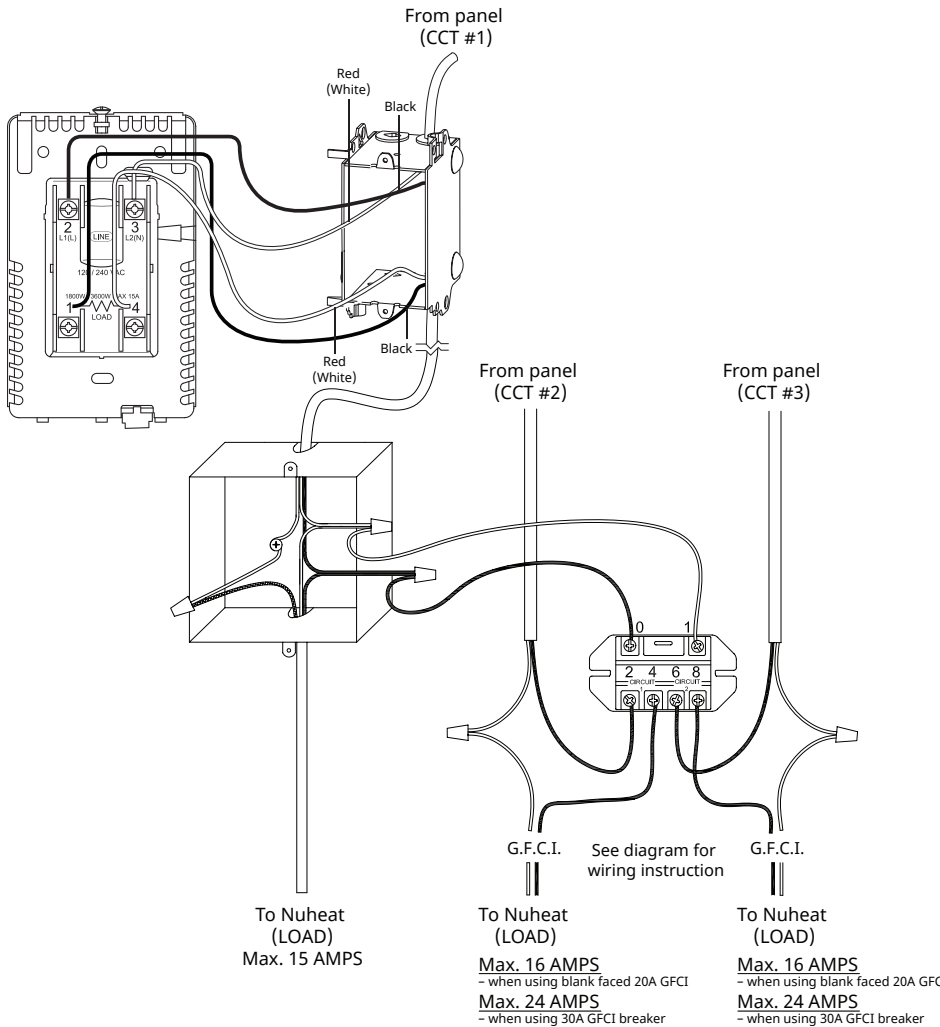

Relay switch or contactor for 120V

This switch allows you to control multiple circuits with a single control. It may be conveniently located inside an electrical junction box.

Nuheat floor heating control with G.F.C.I.

See diagram for wiring instructions.

Wiring instructions for relay (120V)

- 0 – Line 1 from control
- 1 – Neutral wire from control
- 2 – Line 1 feed from panel (CCT #2)
- 6 – Line 2 feed from panel (CCT #3)
- 4 – Line 1 (Black) to Nuheat
- 8 – Line 2 (Black) to Nuheat

Note: Do not connect neutral wires from different circuits together.

Nuheat assumes no responsibility for field wiring. Please consult a certified electrician for further instruction if needed. Wiring must be in accordance with national and local electrical codes. Wiring methods may differ for each control, please consult manufacturer's instructions for actual specifications.

North America

Tel +1.800.778.9276

Nuheat.CustomerCare@chemelex.com

chemelex
excellence is everything

Raychem Tracer Pyrotenax Nuheat